


BMP T5.13 – Soil Amendment

Establishing soil quality and depth provides increased treatment of pollutants and minimize the need for fertilizers and other landscape chemicals.



Test holes should be about one foot deep (after first scraping away any mulch) and about one foot square.

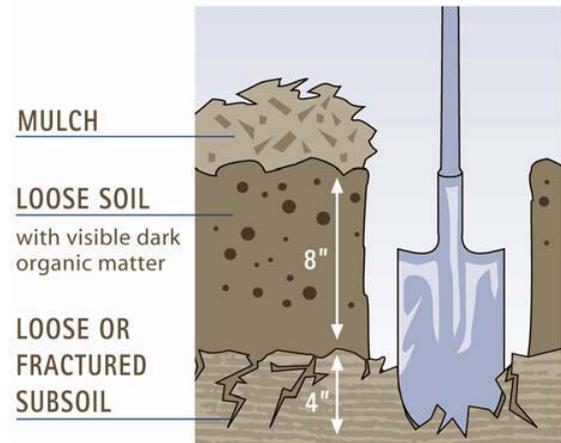

Amending soils with compost or other organic materials can restore soil functions:

- Restores soil water infiltration and storage capacities
- Decreases surface water runoff and erosion
- Traps sediments, heavy metals and excess nutrients; and biodegrades chemical contaminants
- Rebuilds the beneficial soil life that fights pests and disease, and supplies plants with nutrients and water
- Improves plant health, with reduced need for additional water, fertilizers and pesticides
- Aids deep plant root growth and vigorous vegetative cover.

Revised 3/30/12



Community Development
 1300 Franklin Street, Vancouver, Washington
 Phone: (360) 397-2375 Fax: (360) 397-2011
www.clark.wa.gov/development



For an alternate format, contact the Clark County ADA Compliance Office.
 Phone: (360) 397-2322
 Relay: 711 or (800) 833-6384
 E-mail: ADA@clark.wa.gov

BMP T5.13 Post-Construction Soil Quality and Depth

Purpose and Definition

Naturally occurring (undisturbed) soil and vegetation provide important stormwater functions including: water infiltration; nutrient, sediment, and pollutant adsorption; sediment and pollutant biofiltration; water interflow storage and transmission; and pollutant decomposition. These functions are largely lost when development strips away native soil and vegetation and replaces it with minimal topsoil and sod. Not only are these important stormwater functions lost, but such landscapes themselves become pollution-generating pervious surfaces due to increased use of pesticides, fertilizers and other landscaping and household/industrial chemicals, the concentration of pet wastes, and pollutants that accompany roadside litter.

Establishing soil quality and depth regains greater stormwater functions in the post development landscape, provides increased treatment of pollutants and sediments that result from development and habitation, and minimizes the need for some landscaping chemicals, thus reducing pollution through prevention.

Applications and Limitations

Establishing a minimum soil quality and depth is not the same as preservation of naturally occurring soil and vegetation. However, establishing a minimum soil quality and depth will provide improved onsite management of stormwater flow and water quality.

Soil organic matter can be attained through numerous materials such as compost, composted woody material, biosolids, and forest product residuals. It is important that the materials used to meet the soil quality and depth BMP be appropriate and beneficial to the plant cover to be

established. Likewise, it is important that imported topsoils improve soil conditions and do not have an excessive percent of clay fines.

Design Guidelines

- Soil retention. The duff layer and native topsoil should be retained in an undisturbed state to the maximum extent practicable. In any areas requiring grading remove and stockpile the duff layer and topsoil on site in a designated, controlled area, not adjacent to public resources and critical areas, to be reapplied to other portions of the site where feasible.
- Soil quality. All areas subject to clearing and grading that have not been covered by impervious surface, incorporated into a drainage facility or engineered as structural fill or slope shall, at project completion, demonstrate the following:
 1. A topsoil layer with a minimum organic matter content of ten percent dry weight in planting beds, and 5 percent organic matter content in turf areas, and a pH from 6.0 to 8.0 or matching the pH of the original undisturbed soil. The topsoil layer shall have a minimum depth of eight inches except where tree roots limit the depth of incorporation of amendments needed to meet the criteria. Subsoils below the topsoil layer should be scarified at least 4 inches with some incorporation of the upper material to avoid stratified layers, where feasible.
 2. Planting beds must be mulched with 2 inches of organic material
 3. Quality of compost and other materials used to meet the organic content requirements:
 - a. The organic content for “pre-approved” amendment rates can be met only using compost that meets the definition of “composted materials” in WAC 173-350-220. This code is available online at:

www.ecy.wa.gov/programs/swfa/facilities/350.html.

The compost must also have an organic matter content of 35 percent to 65 percent, and a carbon to nitrogen ratio below 25:1.

The carbon to nitrogen ratio may be as high as 35:1 for plantings composed entirely of plants native to the Puget Sound Lowlands region.

- b. Calculated amendment rates may be met through use of composted materials as defined above; or other organic materials amended to meet the carbon to nitrogen ratio requirements, and meeting the contaminant standards of Grade A Compost.

The resulting soil should be conducive to the type of vegetation to be established.

- **Implementation Options:** The soil quality design guidelines listed above can be met by using one of the methods listed below
 1. Leave undisturbed native vegetation and soil, and protect from compaction during construction.
 2. Amend existing site topsoil or subsoil either at default “preapproved” rates, or at custom calculated rates based on specifiers tests of the soil and amendment.
 3. Stockpile existing topsoil during grading, and replace it prior to planting. Stockpiled topsoil must also be amended if needed to meet the organic matter or depth requirements, either at a default “pre-approved” rate or at a custom calculated rate.
 4. Import topsoil mix of sufficient organic content and depth to meet the requirements.

More than one method may be used on different portions of the same site. Soil that already meets the depth and organic matter quality standards, and is not compacted, does not need to be amended.

Planning/Permitting/Inspection/Verification Guidelines & Procedures

- Local governments are encouraged to adopt guidelines and procedures similar to those recommended in *Guidelines and Resources For Implementing Soil Quality and Depth BMP T5.13 in WDOE Stormwater Management Manual for Western Washington*. This document is available at www.soilsforsalmon.org.

Maintenance

- Soil quality and depth should be established toward the end of construction and once established, should be protected from compaction, such as from large machinery use, and from erosion.
- Soil should be planted and mulched after installation.
- Plant debris or its equivalent should be left on the soil surface to replenish organic matter.
- It should be possible to reduce use of irrigation, fertilizers, herbicides and pesticides. These activities should be adjusted where possible, rather than continuing to implement formerly established practices.

Flow Reduction Credits

Flow reduction credits can be taken in runoff modeling when BMP T5.13 is used as part of a dispersion design under the conditions described in:

BMP T5.10 Downspout Diversion

BMP T5.11 Concentrated Flow Dispersion

BMP T5.12 Sheet Flow Dispersion

Chapter III, Appendix III-C, Section 7.5:

Reverse Slope Sidewalks

Chapter III, Appendix III-C, Section 7.2.4:

Road projects